

SFGT Series

Big Flat Suction Cup



Features

- ◇ Multilayer sealing lip
- ◇ Small inner volume
- ◇ Internal multipoint support structure


Advantages

- ◇ Excellent airtightness, large suction force
- ◇ Short work cycle
- ◇ Prevent workpieces from side slipping
- ◇ Rubber parts can be replaced separately, reduce customer's cost greatly




Applications

- ◇ Flat workpiece with smooth or slightly rough surface
- ◇ Metal sheet
- ◇ Glass

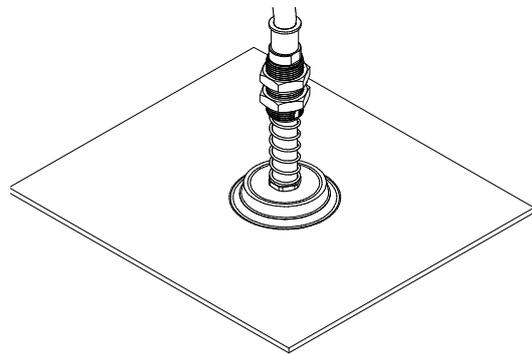

Structure

- ◇ Fitting for suction cup and rubber parts are split structure design, wearing parts can be replaced separately

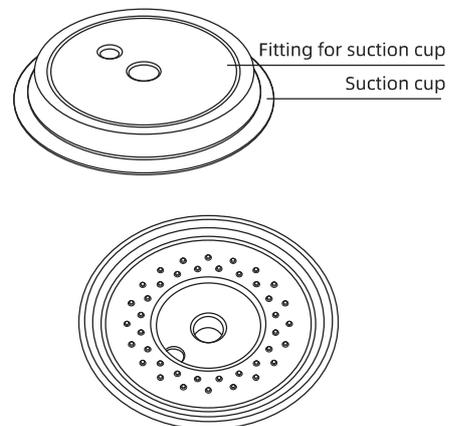

- SZ
- SP3
- SUF
- SAN
- SAO
- SOFA
- STP
- SFT
- SFA
- SBT
- SBL
- SBLP
- SBS
- SFP
- SBP
- SXP
- SGP
- SBOF
- STC
- SFF
- SOB
- SOF
- SOG
- SFM
- SOM
- SBF
- SDM
- SFU
- SFK
- SHT
- SDL
- SFG**
- SFGT**
- SFD
- SB
- SBA
- SF
- SU
- SPA
- SPD
- SPF
- SPC
- SPJ
- SPU
- SH
- SHB
- SBB
- SOP
- SNP

SFGT Series

Big Flat Suction Cup



How to order

SFGT 120 WS - G3F

① ② ③ ④


① Series	② Diameter	③ Material & Hardness	④ Connection thread
SFGT	65 - ϕ 65mm 90 - ϕ 90mm 120 - ϕ 120mm 160 - ϕ 160mm	WS - White silicone 50	Nil - Suction cup only G3F - G3/8 female thread G4F - G1/2 female thread

Technical parameters

Model	Pull-out force N	Inner volume cm ³	Recommended hose Dia. mm	Weight g	MPQ pcs
SFGT65-G3F	110	3.5	8	48	1
SFGT90-G3F	320	11	8	110	1
SFGT120-G3F	550	25	10	226	1
SFGT160-G4F	1010	81	10	584	1


◇ Note: Testing vacuum level -60kPa, workpiece with smooth and clean surface. The data of pull-out force as above are figured out without considering safety factor. The data may be different according to different workpiece surfaces. Recommend the length of vacuum hose to be as short as possible, max 2m.

Dimensions (mm)

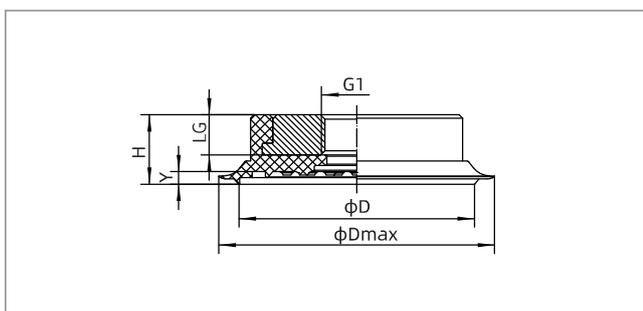

SFGT65-SFGT90

Model/Size	ϕ Dmax	ϕ D	G1	H	Y	LG
SFGT65-G3F	65	55	G3/8	16.5	3	9.5
SFGT90-G3F	90	79.5	G3/8	17	2.5	11

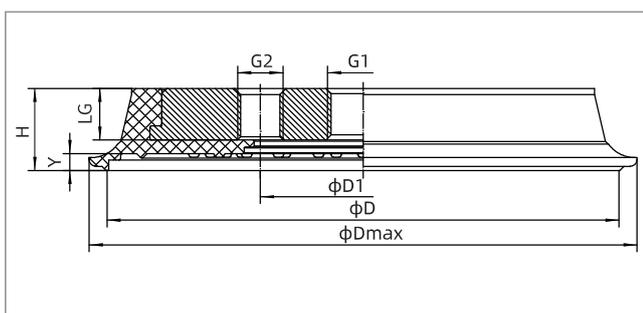

SFGT120-SFGT160

Model/Size	ϕ Dmax	ϕ D	ϕ D1	G1	G2	H	Y	LG
SFGT120-G3F	120	108	52	G3/8	G1/4	17.4	2.9	11
SFGT160-G4F	160	150	60	G1/2	G1/4	24.4	5.2	15.2

◇ Note: 1. The dimensional tolerance conforms to GB/T3672.1-2002-1 M3 rubber product dimensional tolerance standard.
2. Dmax is outer diameter of the suction cup when it is completely compressed